


VITA INCERAMAT 3T

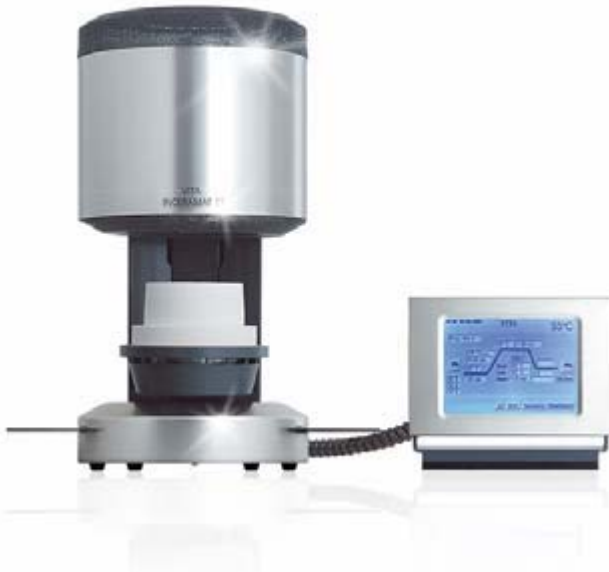

Technical information

General description

*Powerful in technology – highest temperature accuracy temperature sensors
Time saving operating comfort – moderate spatial requirements – optimal firing results
Housing made of paint finished sheet steel and stainless steel
Firing charge rack
Firing chamber furnished with high quality insulating material
Quartz material firing muffle
Automatic temperature adjustment
Temperature accuracy plus/minus 2 °C*

External control equipped with

*Clearly laid out colour touch screen display
Clearly arranged and self-explaining operation
Operation related notes for possible inputs
Software updates via Memory Stick*

Firing unit

*Width: 240 mm
Depth: 340 mm
Height: 460 mm
Housing: Steel/stainless steel
Weight: 14,0 kg
Firing chamber capacity: Diameter: 90 mm
Height: 55 mm
Firing chamber temperature: max. 1200 °C*